



ROXX Update Instructions

1. Connect Update Box and ROXX unit with a standard DMX-cable. It's possible to update several, daisy chained units at the same time, but we recommend to do the update on only up to 8 units simultaneously.
2. Power up the ROXX unit and the Update Box by pressing the „Power“-button.
3. On the Update Box navigate to „File“ using the four directional buttons around „OK“. Then press „OK“.

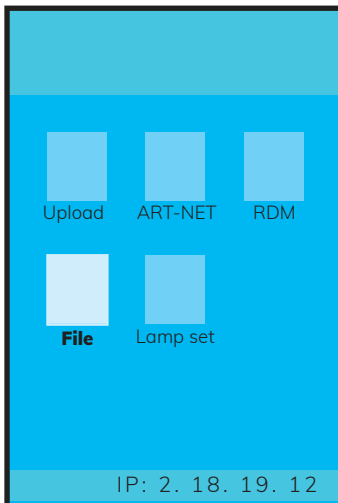


4. Now navigate to the data you want to upload and press „ok“:

COB RGBW = E.SHOW FullColor
 COB W T = E.SHOW Tungsten
 COB W D = E.SHOW Daylight
 COB RGBALC = E.SHOW Tunable White +

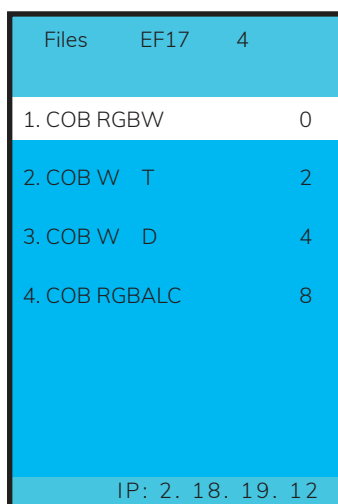

5. Navigate to „Upload files“ and press „OK“.

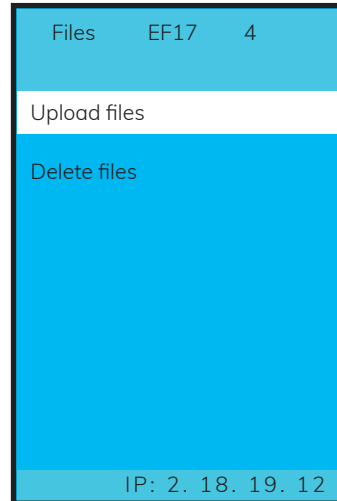

6. The upload starts.

The ROXX unit signals the correct dataflow by green light. You can watch the progress on both displays. After finalized Update the ROXX unit restarts and shows the new firmware version in boot screen and Info menu.

